



# Industrial vehicles



 **DOMAR**


# DK4180/90

## Fast-fit mudguard with white border

Parafango in plastica attacco rapido con bordo bianco  
 Kunststoff Kotflügel mit schnellem Einbausystem und weißem Rand  
 Aile fixation rapide en plastique avec bord blanc  
 Guardabarro plástico con ribete blanco a instalación rápida



Series **EASY**

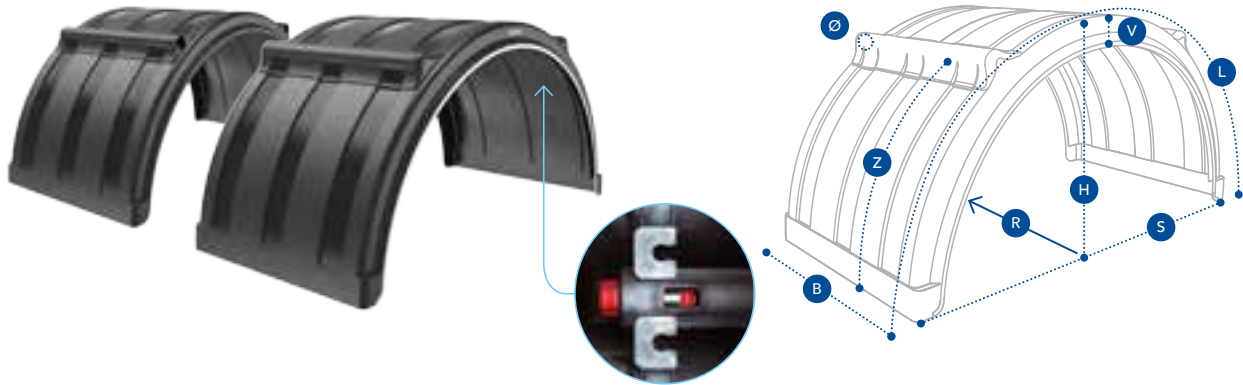

	B	L	R	S	H	V	Z	Ø
<b>DK4180</b>	450	2125	680	1365	670	80	590	42
<b>DK4190</b>	690	2125	680	1365	670	80	590	42

## Stay for DK4180/90

	L	Ø	Th
<b>DK8050</b>	505	42	2,5
<b>DK8051</b>	700	42	2,5

	L	Ø	Th
<b>DK8052</b>	505	42	2,5
<b>DK8053</b>	700	42	2,5

	L	L1	Ø	Th
<b>DK8056</b>	505	390	42	2,5
<b>DK8057</b>	700	580	42	2,5

- |   |  |   |   |   |
|---|--|---|---|---|
| <p>EN</p> <ul style="list-style-type: none"> <li>• Customizable brackets' position</li> <li>• -75% fixing/unfixing time</li> <li>• -50/+80 °C resistance</li> </ul> | <p>IT</p> <ul style="list-style-type: none"> <li>• Posizione attacco rapido personalizzabile</li> <li>• -75% tempo di montaggio/smontaggio</li> <li>• Resistenza -50/+80 °C</li> </ul> | <p>DE</p> <ul style="list-style-type: none"> <li>• Personalisierbare Position des Einbausystems</li> <li>• -75% Zeit für Montage/ Demontage</li> <li>• Widerstand bei -50/+80 °C</li> </ul> | <p>FR</p> <ul style="list-style-type: none"> <li>• Position fixation rapide sur mesure</li> <li>• -75% temps de montage/démontage</li> <li>• Résistance -50/+80 °C</li> </ul> | <p>ES</p> <ul style="list-style-type: none"> <li>• Posición instalación rápida a medida</li> <li>• -75% tiempo de montaje/desmontaje</li> <li>• Resistencia -50/+80 °C</li> </ul> |
|---|--|---|---|---|

