
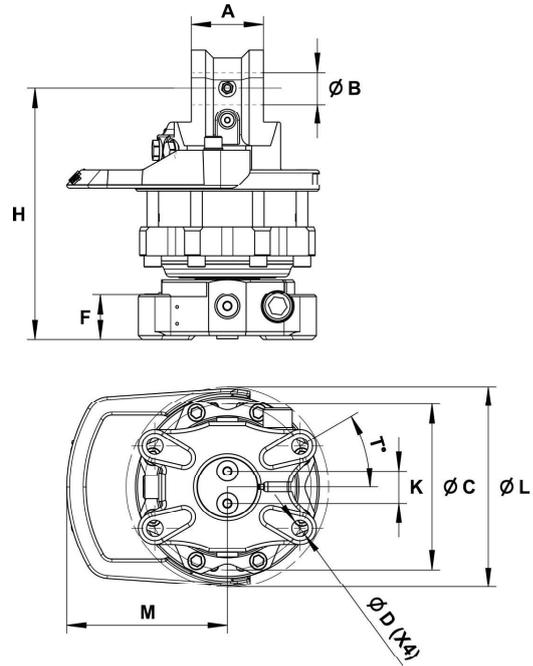


# GV 4/30 I

Part No.: 5040013

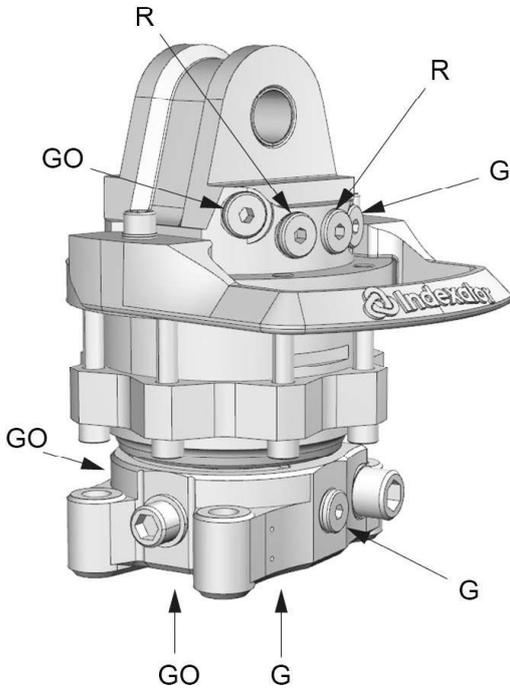

| Upper connection | Lower connection |
|------------------|------------------|
| G 3/8            | G 3/8            |

|             |              |               |              |             |              |             |               |              |           |
|-------------|--------------|---------------|--------------|-------------|--------------|-------------|---------------|--------------|-----------|
| A:<br>75 mm | B:<br>Ø30 mm | C:<br>Ø173 mm | D:<br>Ø17 mm | F:<br>46 mm | H:<br>263 mm | K:<br>34 mm | L:<br>Ø207 mm | M:<br>166 mm | T:<br>30° |
|-------------|--------------|---------------|--------------|-------------|--------------|-------------|---------------|--------------|-----------|

|  |   |   |   |  |  |  |  |  |
|--|---|---|---|--|--|--|--|--|
| <br>31.9 kg | <br>360° | <br>Max<br>45 kN | <br>Max<br>25 kN | <br>1150 Nm | <br>Max<br>12 l/min | <br>Max<br>25 MPa | <br>Max<br>30 MPa | <br>Max<br>30 MPa |
|--|---|---|---|--|--|--|--|--|

Adapter sets are available for alternative connections.

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact [rotator@indexator.com](mailto:rotator@indexator.com)