



0-443-19 - Magnetic 1FT Lightbar - Remote Control with Li Ion Battery

Durite LED Beacon Light Bar with 4x Li Ion 18650 batteries 7.4V 4400mAh. Magnetic Base x 10 Magnets, Amber, 12/24v, 10 Flash Patterns. 24W max power, 30 x 3W LED's (90W theoretical power). Supplied with coiled cable 3.8M working length and 12/24v cigar plug. IP66. Speed Rating 70MPH. Charge time 3-4 Hours. Run time 6-8 hours. E Marked R65 (while connected to 12/24VDC), R10.05 EMC.

Flash Patterns:

1. Rotating. 2. Single Flash (R65) 3. Dual Flash (R65) 4. Double flashing for left and right alternately 5. Triple Flash 6. Alternating Triple Flash 7. Triple flash for left and right alternately + Left and right change the flashing alternately and automatically. 8. Quintuple flashing for left and right alternately + Single flashing changes automatically 9. Single flashing changes quickly and slowly 10. Full flashing + Left and right change the flashing alternately and automatically.

THE TRUSTED QUALITY BRAND FOR PROFESSIONALS



Product Contents



1 x Light




1 x R/C




**1 x 12/24V Car
Charger**

Product Layout

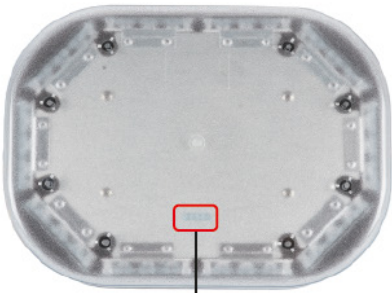

3

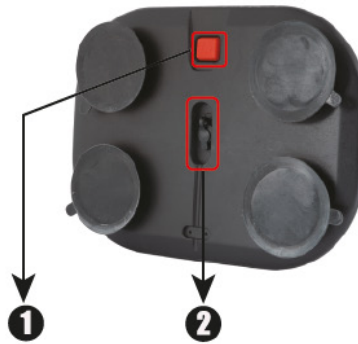


1


2

- 1** On/Off Switch
- 2** Charging Port
- 3** Battery Indicator

Operation - Manual

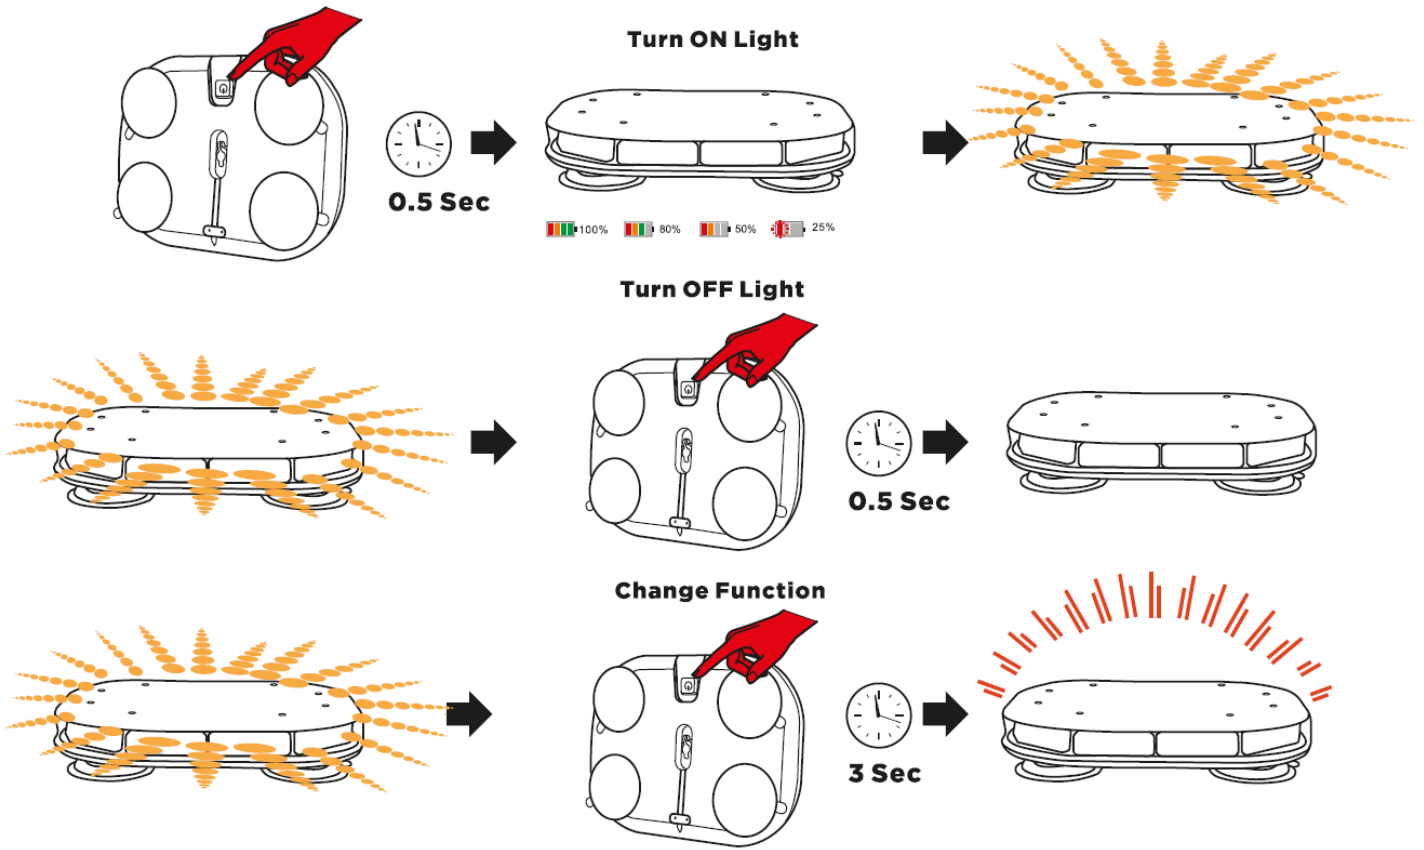


Operation - Remote Control

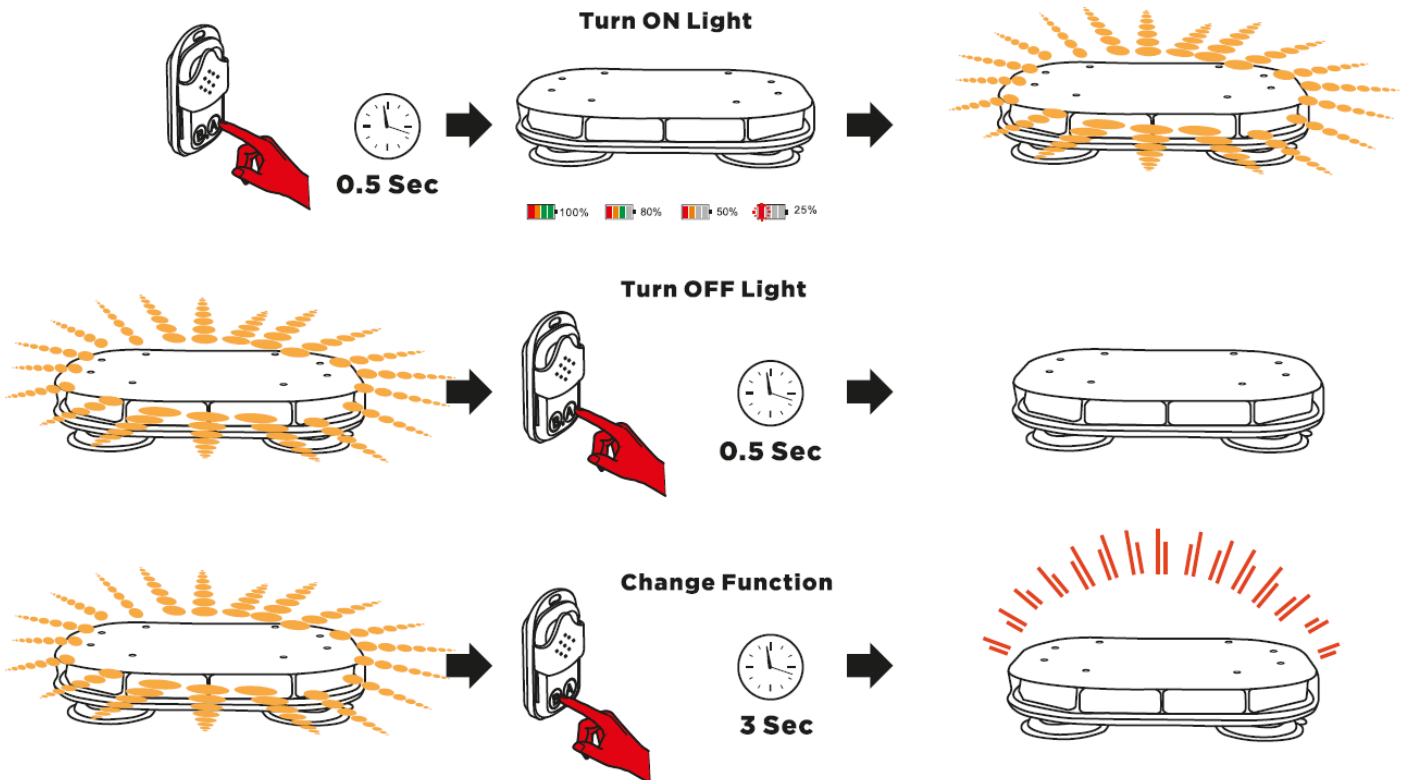


Pairing Process

Please make sure the battery of the light has enough charge.

Please make sure the light and the remote are in signal communication range.

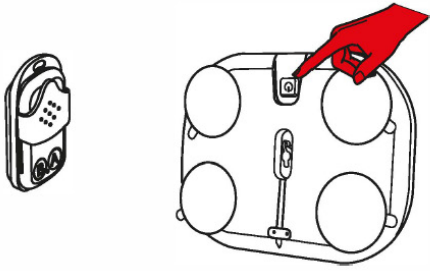

Press "ON/OFF" 5times Continuously
Within 2.5Sec

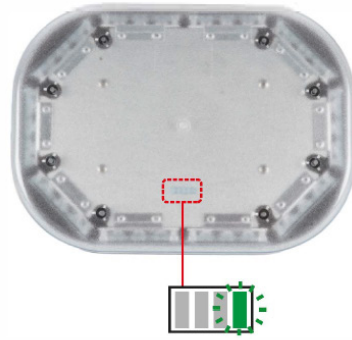

The green light of the battery indicator
with light up for 30seconds



During this period press any button of the Remote once.

The matching process will be completed and the green light extinguishes.

One light can match 2 remotes Maximum.



TECHNICAL SPECIFICATIONS

Type	LED Light Bar - Magnetic Base with Li Ion
Colour	Amber
Voltage	12/24V
Current	2.0A at 12VDC, 1.0A at 24VDC
Number of LED's	30
LED Power	3W
Power	24W Max Power (90W theoretical Power)
Lens	Clear Polycarbonate
Housing	ABS
Weight	1.2Kg
Dimensions	Please see diagram below
IP Rating	IP66
Flash Patterns	10
Operating Temperature	-20°C to +50°C
Compliance	E Marked ECE R65 (12/24V only), ECE R10.05. RoHS. CE.

TECHNICAL DRAWING

