




**LED Beacon Light Bar, 12/24v ECE R65 Single Bolt  
Part 0-443-60**

**GENERAL**

Durite's 12/24v Single Bolt LED Beacon Bar with 3 selectable flash patterns. Single Bolt mounting with 4metre flying leads. Single Flash ECE R65.

**PRODUCT AND DIMENSIONAL DRAWING**

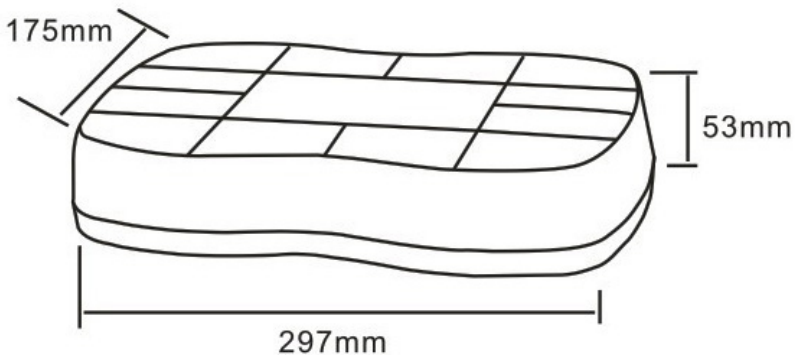

## INSTALLATION GUIDE

1. Check and inspect beacon bar.
2. Drill a 12.5mm hole in roof for the beacon bar cable where appropriate.
3. Run the beacon bar cable through the 12.5mm hole.
4. Use washers in the kit provided to seal and additional sealant if required when securing beacon bar in place.
5. Run the cables and hardwire as appropriate. Wire colour function below:

**Black** : Negative Polarity

**Red** : Positive Polarity

**Yellow** = Flash Pattern Select. (Connect this to Earth momentarily to change the flash pattern).

## SPECIFICATION

Type.....	LED Light Bar
Colour.....	Amber
Voltage.....	12/24v
Current.....	.2A
Number of LED's.....	.20
LED Power.....	.3W
Lens.....	Polycarbonate
Housing.....	ABS
Weight.....	1.35Kg
Dimensions.....	397*175*53mm
IP Rating.....	IP65
Flash Patterns.....	Single, Double and Rotating.
Compliance.....	E Marked ECE R65 (Single Flash)